


Fixture Lengths

CSS


Fixture Type

Approval

Continuous Run Individual Cable Centers

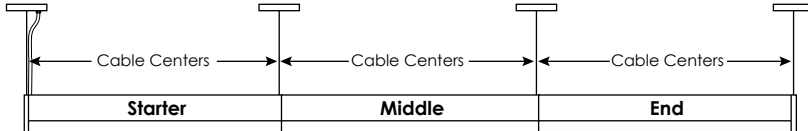

Stand Alone Cable Centers & Overall Length



Fixture Length	Cable/Arm Centers (in)	Fixture Length	Cable/Arm Centers (in)	Fixture Length	Cable/Arm Centers (in)
2'	21.425"	2'	17.920"	2'	19.295"
3'	33.250"	3'	29.730"	3'	31.105"
4'	45.050"	4'	41.540"	4'	42.915"
6'	62.980"	6'	59.460"	6'	60.835"
7'	74.790"	7'	71.270"	7'	72.645"
8'	86.590"	8'	83.080"	8'	84.455"

Fixture Length	Cable/Arm Centers (in)	Overall Length (in)
2'	22.800"	23.050"
3'	34.625"	34.875"
4'	46.425"	46.675"
6'	64.355"	64.605"
7'	76.165"	76.415"
8'	87.965"	88.215"

Continuous Run Lengths and Fixture Length Segments


Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
9	8' - 10.125"	6-4
10	9' - 9.938"	8-3
11	10' - 9.750"	8-4
12	12' - 3.688"	7-7
13	12' - 9.813"	6-6-3
14	13' - 9.625"	6-6-4
15	14' - 9.375"	8-6-3
16	15' - 9.188"	8-6-4
17	16' - 9.000"	8-8-3
18	17' - 8.813"	8-8-4
19	18' - 9.063"	6-6-6-4
20	19' - 8.875"	8-6-6-3
21	20' - 8.688"	8-6-6-4
22	21' - 8.500"	8-8-6-3

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
23	22' - 8.313"	8-8-6-4
24	23' - 8.125"	8-8-8-3
25	24' - 7.938"	8-8-8-4
26	25' - 8.125"	8-6-6-6-4
27	26' - 7.938"	8-8-6-6-3
28	27' - 7.750"	8-8-6-6-4
29	28' - 7.563"	8-8-8-6-3
30	29' - 7.375"	8-8-8-6-4
31	30' - 7.188"	8-8-8-8-3
32	31' - 7.000"	8-8-8-8-4
33	32' - 7.188"	8-8-6-6-6-4
34	33' - 7.000"	8-8-8-6-6-3
35	34' - 6.813"	8-8-8-6-6-4
36	35' - 6.625"	8-8-8-7-6-4

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
37	36' - 6.438"	8-8-8-8-6-4
38	37' - 6.250"	8-8-8-8-8-3
39	38' - 6.063"	8-8-8-8-8-4
40	40' - 0.000"	8-8-8-8-8-6
41	40' - 11.813"	8-8-8-8-8-7
42	41' - 11.625"	8-8-8-8-8-8
43	42' - 11.813"	8-8-8-8-6-6-6
44	43' - 11.625"	8-8-8-8-7-6-6
45	44' - 11.438"	8-8-8-8-8-6-6
46	45' - 11.250"	8-8-8-8-8-7-6
47	46' - 11.063"	8-8-8-8-8-8-6
48	47' - 10.875"	8-8-8-8-8-8-7
49	48' - 10.688"	8-8-8-8-8-8-8
50	49' - 10.938"	8-8-8-8-8-6-6-6

Number of Lamps

2' = (1) 2' lamp	6' = (2) 3' lamps
3' = (1) 3' lamp	7' = (1) 4' lamp & (1) 3' lamp
4' = (1) 4' lamp	8' = (2) 4' lamps



#825-00047
V-1014