




With a vast assortment of ultra-minimal housing profiles that can accommodate T5/T5HO or T8 linear lamps, WP SYSTEM Specification Grade Strip fixtures are the perfect choice when less is best.

Choose from many styles, including: side mount, diagonal, adjustable staggered or individual modules in shorter lengths. Whatever your specification requires, WP SYSTEM fixtures can deliver strong light while providing durability and value to any interior project: commercial, architectural, residential or retail.

Reflectors and various accessories (on some models) combined with dimming capabilities, or emergency battery options complete the make-up for one of our most popular and enduring product lines.

 UL and c-UL listed for dry and damp locations.



Made in the USA

## FIXTURE SPECIFICATIONS

### Construction

Die-formed heavy duty 20 gauge steel construction. Post-formed high reflectivity white powder coat finish provides smooth edges, rust-resistance and even coverage on entire fixture.

### Lamping and Ballast

Single or double T5, T5HO or T8 linear fluorescent lamps in cross section. Integral electronic ballast standard. Dimming and (EM) Emergency battery pack options available. Consult factory for availability and specifications.

### Finishes

Post-formed high-reflectivity white powder coat finish. Custom colors available - consult factory.

### Mounting

Suitable for surface mounting in multiple applications. Ideal for cove or soffit. Compatible for field thru-wiring.

### Fixture Length

Fixtures are available in nominal lengths of 2, 3, and 4 feet. Continuous run mounting and thru-wire compatibility.

### Custom and Mods

We proudly specialize in manufacturing custom and modified luminaires and have the ability to modify most of our standard fixtures. Please contact factory with any inquiries.

www.birchwoodlighting.com

Type: \_\_\_\_\_ Job Name: \_\_\_\_\_

Multi-Application Sliding Strip


**SPECIFICATION CODE**

**WP-** \_\_\_\_\_  
lamps      model      length      finish      voltage      ballast      options


Lamps	Model	Nominal Length	Finish	Voltage <sup>1</sup>	Ballast	Options
<b>T5</b>	<b>1STSAS -</b>	<b>2 - 2'</b>	<b>HRW - High Reflectivity</b>	<b>120</b>	<b>EB - Electronic (standard)</b>	<b>EM<sup>3</sup> - Emergency Battery Pack</b>
<b>T5HO</b>	1 Lamp Sliding	3 - 3'	White (standard)	277	Dimming	<b>LS - Protective Lamp Sleeve</b>
<b>T8</b>	Adjustable Stagger	4 - 4'	<b>CUP - Custom Paint</b>		<b>HL3 - Hi-Lume</b>	
	<b>2STSAS -</b>	<b>CR_</b>			<b>ES - EcoSystem</b>	
	2 Lamp Sliding	Continuous			<b>ESH - EcoSystem</b>	<b>NOTES</b>
	Adjustable Stagger	Run <sup>2</sup>			H-Series	1 other voltages available, consult factory
					<b>0-10V - 0-10V</b>	2 CR fixtures are field thru-wire compatible
						3 not available in all lengths, consult factory

**Dimensions**


**1STSAS or 2STSAS T5/T5HO**

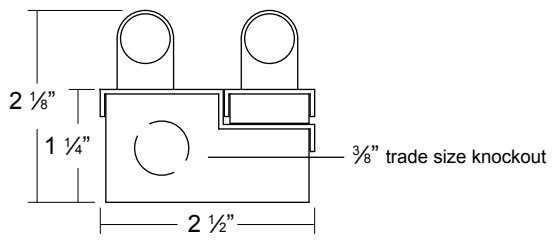


**1STSAS or 2STSAS T8**

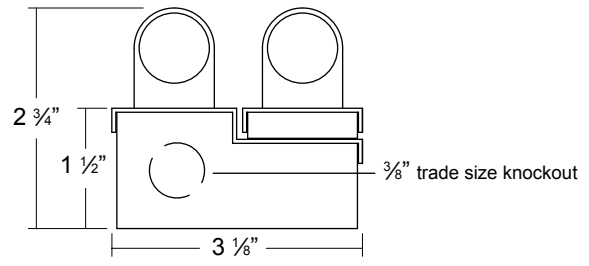

**1STSAS T5/T5HO/T8**

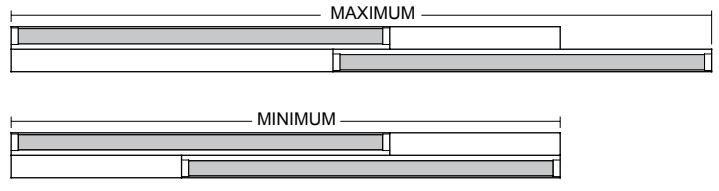

**2STSAS T5/T5HO/T8**

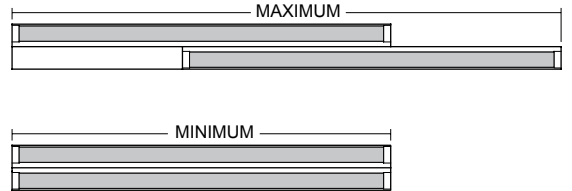

**1STSAS T5/T5HO extension table**

Nominal T5 or T5HO	Min/Max Lengths	
	Min	Max
2'	31 1/2"	41"
3'	49 1/4"	64 1/2"
4'	67"	88 1/4"

**1STSAS T8 extension table**

Nominal T8	Min/Max Lengths	
	Min	Max
2'	34 1/2"	44 1/2"
3'	52 1/2"	68 1/2"
4'	70 1/2"	92 1/2"

**2STSAS T5/T5HO extension table**

Nominal T5 or T5HO	Min/Max Lengths	
	Min	Max
2'	22 1/16"	32 1/8"
3'	34 1/4"	49 7/8"
4'	46 1/16"	67 9/16"

**2STSAS T8 extension table**

Nominal T8	Min/Max Lengths	
	Min	Max
2'	24"	34 3/4"
3'	36"	52 3/4"
4'	48"	70 3/4"