


**Wiring Diagram**

#821-00009

Conduit or Arms to Integral Ballast/Driver


Wire colors may vary from manufacturers, refer to color code label imprinted on ballast/driver or provided wiring diagram.

**Ballast Option EB or M10  
LED Driver: Option EB or HLA2**




**A**

**Ballast Option 0 - 10V or DALI  
LED Driver: Option D1 or D10 or DALI**

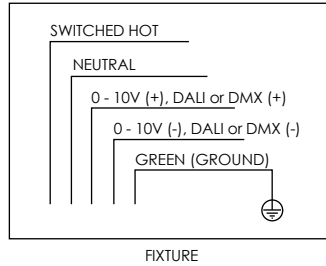


**B**

**Ballast Option ESH (Lutron H- series)  
LED Driver: Option HLAD**

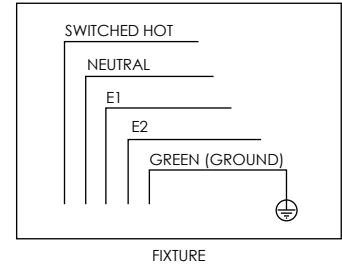


**C**

**Ballast Option ES, HL3 (3 wire dimming)  
LED Driver: HLA3**

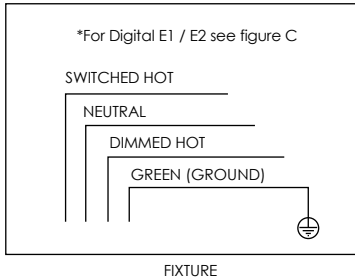


**D**

**Ballast Option EB w/EM**

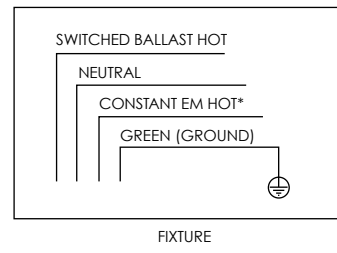


**E**

**Ballast Option 0 - 10V w/EM or DALI  
LED Driver: Option D1 or D10 or DALI**

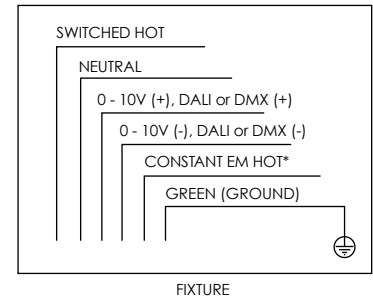


**F**

**Ballast Option ES, HL3 w/EM  
(3-wire dimming)**

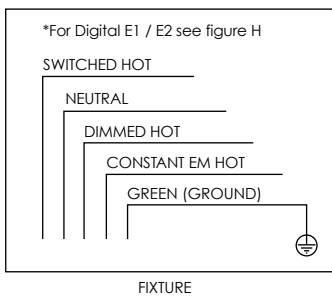


**G**

**Ballast Option ES w/EM**

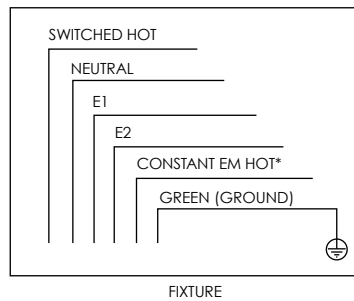


**H**

**Ballast Option EB or M10 w/2CKT Option  
LED Driver: Option EB or HLA2**

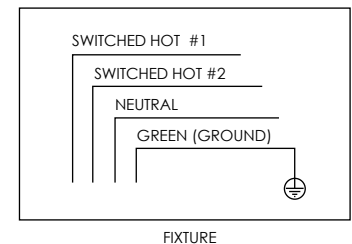


**I**

**Ballast Option 0 - 10V or DALI w/2CKT option  
LED Driver: Option D1 or D10 or DALI**

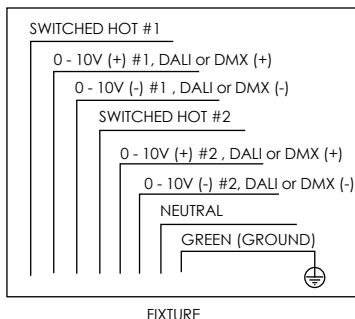


**J**

**Ballast Option ES, HL3 w/2CKT option  
(3 wire dimming) LED Driver: Option HLA3**

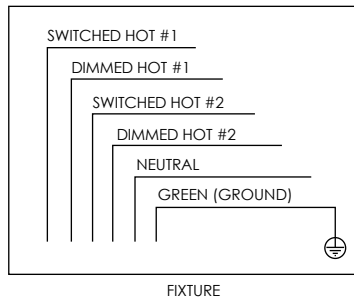

**K**

**Ballast Option 2CKT and EM Option  
EB or M10**

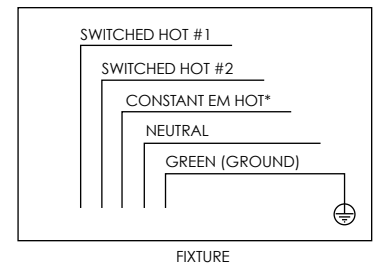

**L**

\* Select proper voltage lead of battery pack inside fixture. Cap unused lead.

**Note:** To be installed by a qualified electrician per N.E.C. and all local codes.

V-0816