


Wiring Diagram

#821-00010


RB w/AWM (Power Cord Drop)

Ballast Option 1 Lamp EB (PRS)

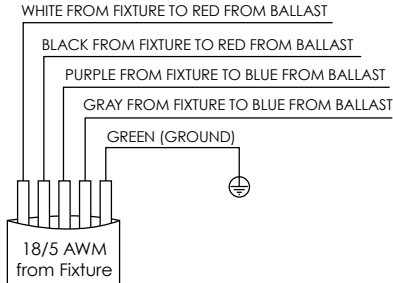


A

Ballast Option T8-EB 1 Lamp (Instant)

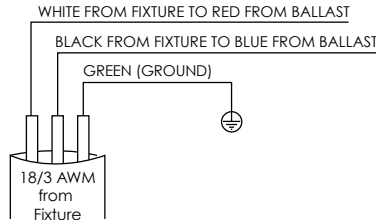


B

Ballast Option T8 - EB 2 Lamp (Instant)

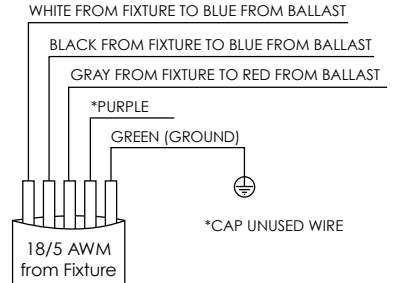


C

Ballast Option ES, HL3, ESH, 0-10V, M10 or DALI

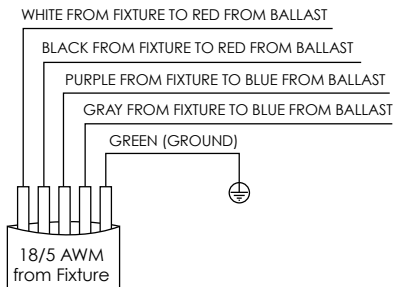


D

Ballast Option T8 EB w/2CKT (Instant)

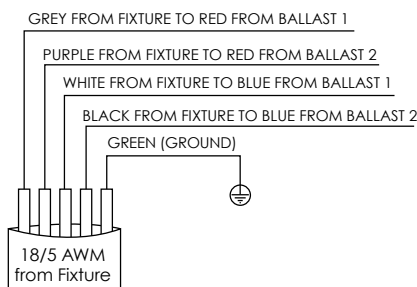


E

Ballast Option EB w/EM (PRS)

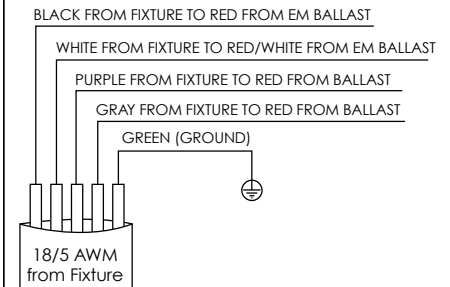


F

LED Driver Option: EB, HLA2, HLA3, HLAD, D1, D10 or DALI

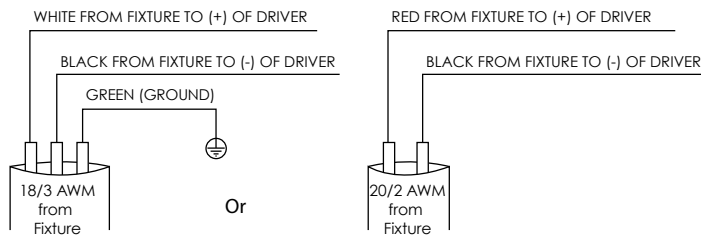

G

LED Driver Option: 2 Remote Drivers EB, HLA2, HLA3, HLAD, D1, D10 or DALI

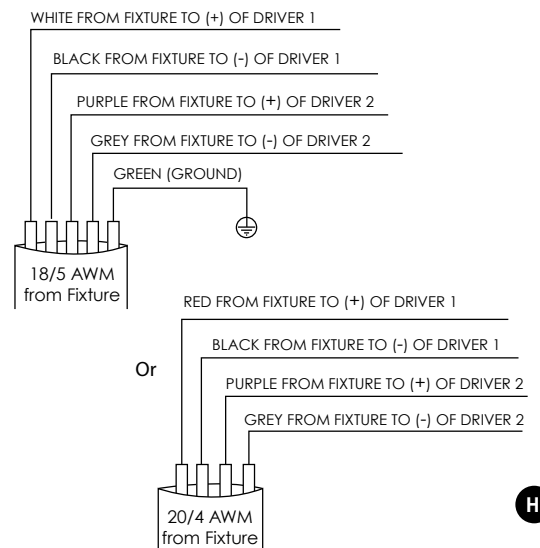

H

For direct/indirect fixtures the red and black wire is direct, purple and grey is indirect

Note: Wire color dependant upon battery pack/ballast manufacturer. See wiring diagram shipped with fixtures.

Note: To be installed by a qualified electrician per N.E.C. and all local codes.

V-0117