



JAKE

Wall Graze/Wall Wash

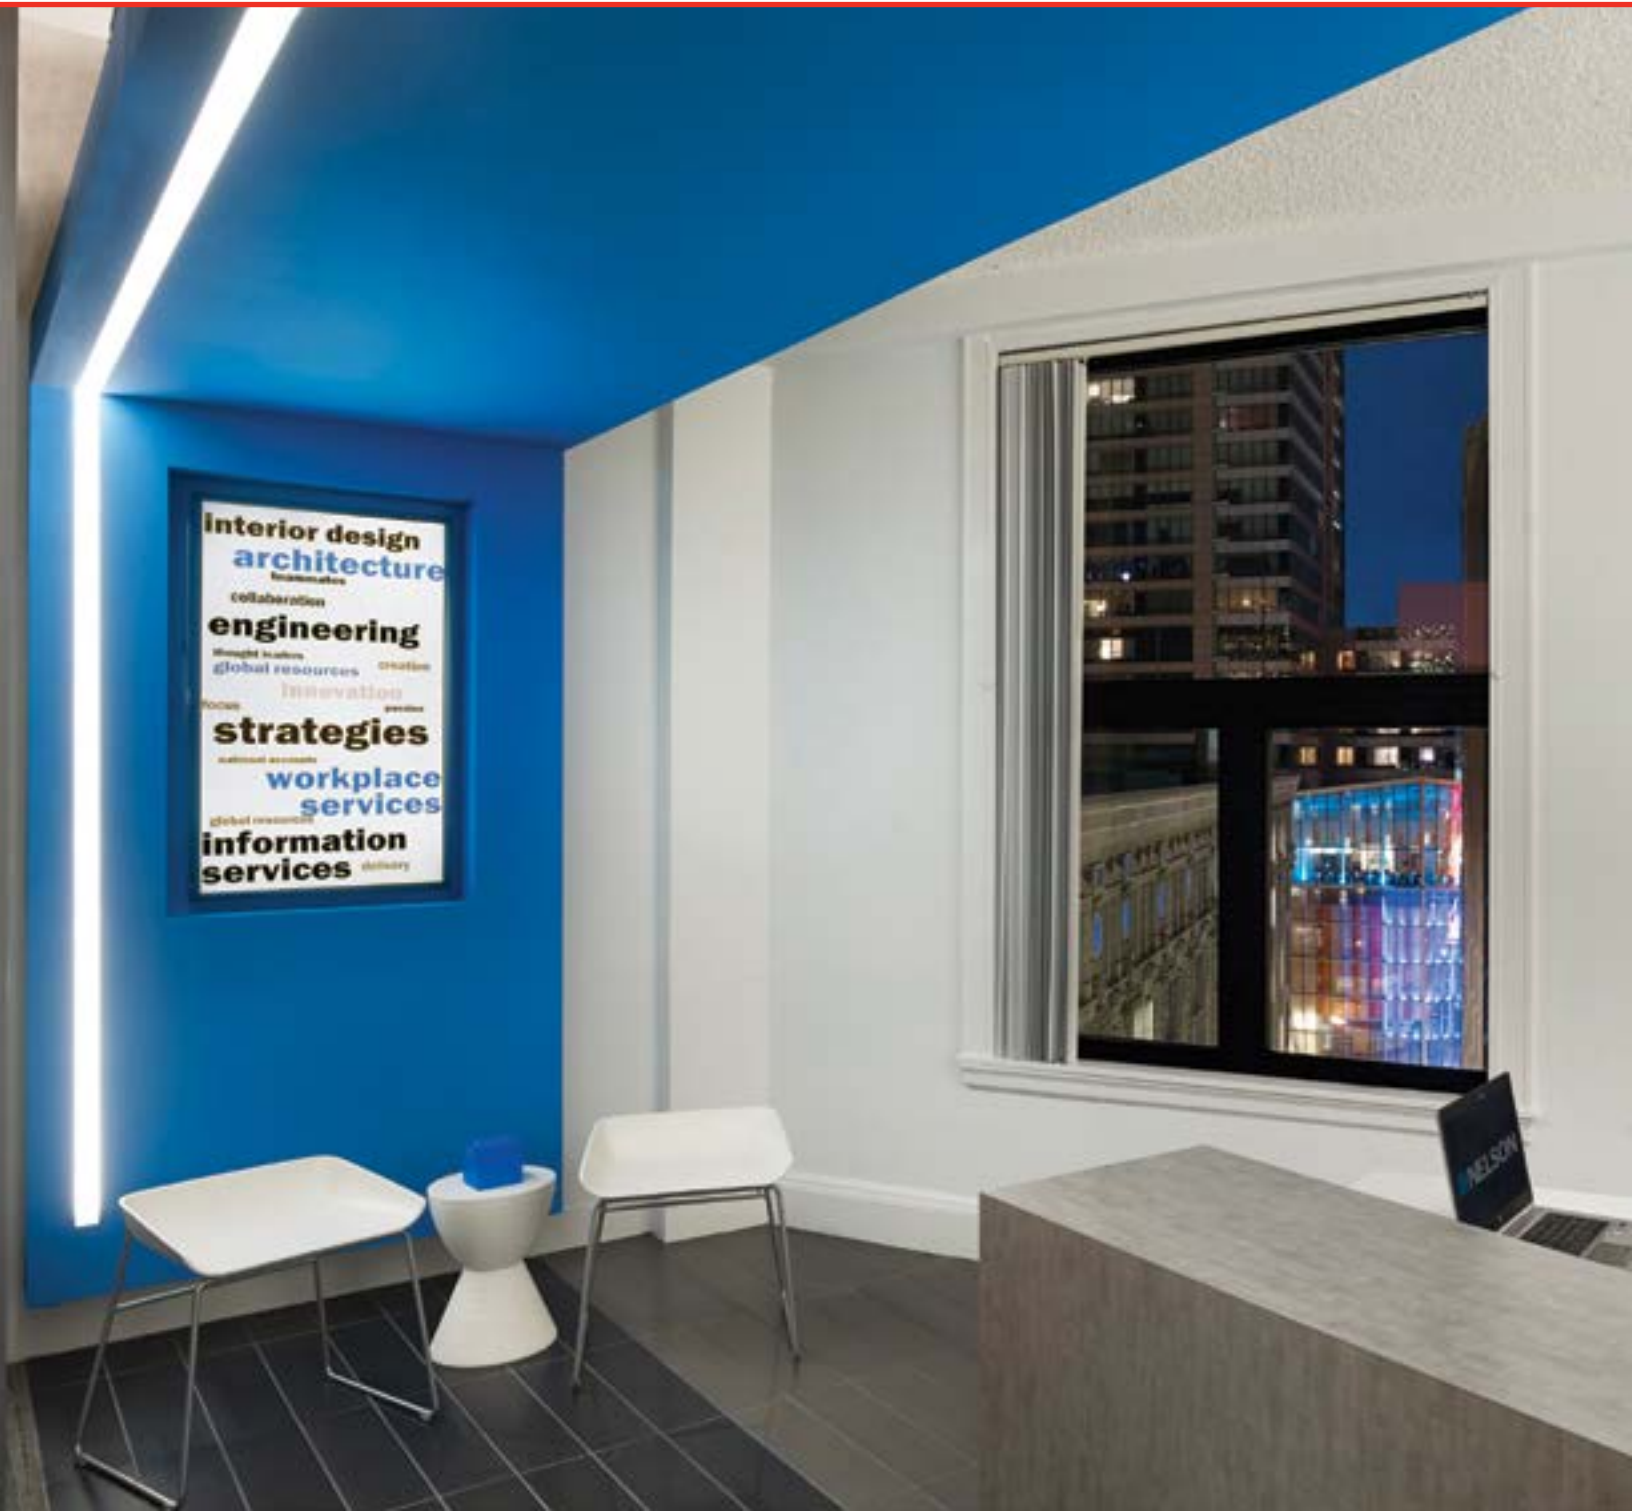

JAKE Wall Graze / Wall Wash

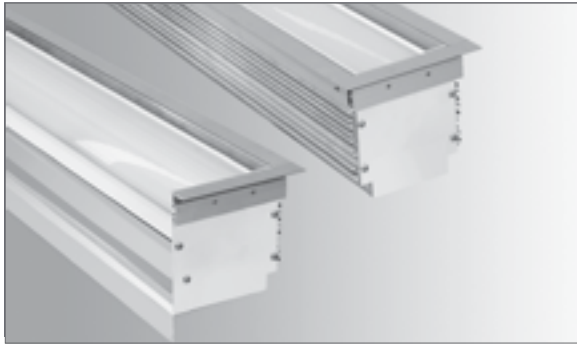

JAKE is a linear recessed luminaire comprised of various apertures, light sources and accessory options. JAKE is available in 1.65", 2.25", 3.25" and 5.00" aperture sizes for hard ceiling, drywall and T-grid installations.

Choose Trim (TR) with 3/4" flange, "Trim-less" (TL) with mud-over flange or T-grid ceiling system mounting. Heavy gauge extruded aluminum housings provide strength but remain relatively lightweight.

JAKE is available with multiple LED and fluorescent options as well as a LED wall wash, wall graze and perimeter mount. Lenses, louvers, distinctive finishes and a variety of mounting orientations qualify JAKE as one of our most sophisticated luminaires yet.

Construction:

- Fixture body is constructed of heavy gauge extruded aluminum
- Available in nominal lengths of 2 - 8 feet, and continuous run lengths
- 90° mitered & custom angle options available

Performance Optics:

- 2700K-4000K 80 & 90CRI
- Outputs are available as HLO (High Lumen Output) and SLO (Standard Lumen Output) providing efficient illumination. CLO (Custom Lumen Output)

Electrical:

- Custom User Specified Lumen & wattage output - available (CLO)
- Optional Dimming up to 1% is available with a variety of control protocols and options

PROFILE SIZES



Flush Lens



3" Regressed lens

MOUNTING TYPES



Flush



Regressed

LIGHT DIRECTION



Wall Wash



Wall Graze

LENS APPLICATION TYPES



Flush



Regressed



Flush Wall Wash



3" Regressed

NOMINAL LENGTH




Standard
2', 3', 4', 6' & 8'




Continuous Run
(≤ 8 Increments of 1')
(see matrix for segment lengths & cable spacing)

TRIM STYLE



Flanged Trim



Trimless
Mud-over Flange

LENS/OPTIC TYPES

Efficacy:
Up to 120lm/W
Beam:
105°



High Efficiency
(HE)

Efficacy:
Up to 112lm/W
Beam:
15°



Asymmetric
(AS)

Efficacy:
Up to 105lm/W
Beam:
70°



Elliptical
(E70)

Efficacy:
Up to 115lm/W
Beam:
125°



Batwing
(BW)

Efficacy:
Up to 109lm/W
Beam:
105°



Flat Blade
Louver

Efficacy:
up to 95lm/W
Beam:
105°



Frosted White
(Standard)

*See [specification sheet](#) for complete technical details.