


Fixture Lengths

CSS-DR

Fixture Type


Approval

Continuous Run Individual Cable/Arm Centers

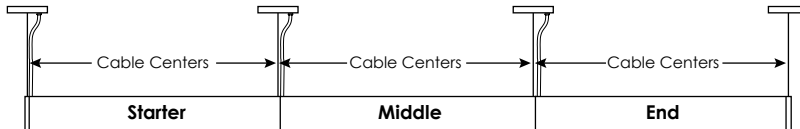

Fixture Length	Cable/Arm Centers (in)	Fixture Length	Cable/Arm Centers (in)	Fixture Length	Cable/Arm Centers (in)
2'	23.250"	2'	24.375"	2'	25.750"
3'	35.250"	3'	36.375"	3'	37.750"
4'	47.250"	4'	48.375"	4'	49.750"

Stand Alone Cable/Arm Centers & Overall Length



Fixture Length	Cable/Arm Centers (in)	Overall Length (in)
2'	24.625"	24.875"
3'	36.625"	36.875"
4'	48.625"	48.875"
6'*	72.625"	72.875"
7'*	N/A	84.875"
8'*	96.625"	96.875"

* 2 power drops for Program Rapid Start or Dimming on 6', 7' and 8' stand alone fixtures

Continuous Run Lengths and Fixture Length Segments


Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
6	6' - 1.25"	3-3
7	7' - 1.25"	4-3
8	8' - 1.25"	4-4
9	9' - 1.625"	3-3-3
10	10' - 1.625"	4-3-3
11	11' - 1.625"	4-4-3
12	12' - 1.625"	4-4-4
13	13' - 2"	4-3-3-3
14	14' - 2"	4-4-3-3
15	15' - 2"	4-4-4-3
16	16' - 2"	4-4-4-4
17	17' - 2.375"	4-4-3-3-3
18	18' - 2.375"	4-4-4-3-3
19	19' - 2.375"	4-4-4-4-3
20	20' - 2.375"	4-4-4-4-4

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
21	21' - 2.75"	4-4-4-3-3-3
22	22' - 2.75"	4-4-4-4-3-3
23	23' - 2.75"	4-4-4-4-4-3
24	24' - 2.75"	4-4-4-4-4-4
25	25' - 3.125"	4-4-4-4-3-3-3
26	26' - 3.125"	4-4-4-4-4-3-3
27	27' - 3.125"	4-4-4-4-4-4-3
28	28' - 3.125"	4-4-4-4-4-4-4
29	29' - 3.5"	4-4-4-4-4-3-3-3
30	30' - 3.5"	4-4-4-4-4-4-3-3
31	31' - 3.5"	4-4-4-4-4-4-4-3
32	32' - 3.5"	4-4-4-4-4-4-4-4
33	33' - 3.875"	4-4-4-4-4-4-3-3-3
34	34' - 3.875"	4-4-4-4-4-4-4-3-3
35	35' - 3.875"	4-4-4-4-4-4-4-4-3

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
36	36' - 3.875"	4-4-4-4-4-4-4-4-4
37	37' - 4.25"	4-4-4-4-4-4-4-3-3-3
38	38' - 4.25"	4-4-4-4-4-4-4-4-3-3
39	39' - 4.25"	4-4-4-4-4-4-4-4-4-3
40	40' - 4.25"	4-4-4-4-4-4-4-4-4-4
41	41' - 4.625"	4-4-4-4-4-4-4-4-3-3-3
42	42' - 4.625"	4-4-4-4-4-4-4-4-4-3-3
43	43' - 4.625"	4-4-4-4-4-4-4-4-4-4-3
44	44' - 4.625"	4-4-4-4-4-4-4-4-4-4-4
45	45' - 5"	4-4-4-4-4-4-4-4-4-3-3-3
46	46' - 5"	4-4-4-4-4-4-4-4-4-4-3-3
47	47' - 5"	4-4-4-4-4-4-4-4-4-4-4-3
48	48' - 5"	4-4-4-4-4-4-4-4-4-4-4-4
49	49' - 5.375"	4-4-4-4-4-4-4-4-4-4-3-3-3
50	50' - 5.375"	4-4-4-4-4-4-4-4-4-4-4-3-3

Number of Lamps

- 2' = (1) 2' lamp
- 3' = (1) 3' lamp
- 4' = (1) 4' lamp
- 6' = (2) 3' lamps
- 7' = (1) 4' lamp & (1) 3' lamp
- 8' = (2) 4' lamps



#825-00103
V-0714