


**Fixture Lengths**

**CSS-DR**

Fixture Type


Approval

**Continuous Run Individual Cable Centers**

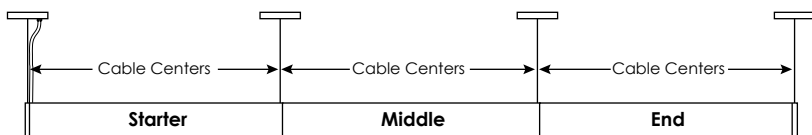

Fixture Length	Cable/Arm Centers (in)	Fixture Length	Cable/Arm Centers (in)	Fixture Length	Cable/Arm Centers (in)
2'	23.250"	2'	19.492"	2'	20.867"
3'	35.250"	3'	31.492"	3'	32.867"
4'	47.250"	4'	43.492"	4'	44.867"
6'	66.742"	6'	62.984"	6'	64.359"
7'	78.742"	7'	74.984"	7'	76.359"
8'	90.742"	8'	86.984"	8'	88.359"

**Stand Alone Cable Centers & Overall Length**



Fixture Length	Cable/Arm Centers (in)	Overall Length (in)
2'	24.625"	24.875"
3'	36.625"	36.875"
4'	48.625"	48.875"
6'	68.117"	68.367"
7'	80.117"	80.367"
8'	92.117"	92.367"

**Continuous Run Lengths and Fixture Length Segments**


Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
9	9' - 3.875"	6-4
10	10' - 3.875"	7-4
11	10' - 11.375"	6-6
12	11' - 11.375"	7-6
13	12' - 11.375"	8-6
14	13' - 11.375"	8-7
15	14' - 11.375"	8-8
16	15' - 6.813"	8-6-3
17	16' - 6.813"	8-6-4
18	17' - 6.813"	8-7-4
19	18' - 6.813"	8-8-4
20	20' - 2.313"	8-8-6
21	21' - 2.313"	8-8-7
22	22' - 2.313"	8-8-8

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
23	22' - 9.813"	8-8-6-3
24	23' - 9.813"	8-8-6-4
25	24' - 9.813"	8-8-7-4
26	25' - 9.813"	8-8-8-4
27	27' - 5.313"	8-8-7-7
28	28' - 5.313"	8-8-8-7
29	29' - 5.313"	8-8-8-8
30	30' - 0.813"	8-8-8-6-3
31	31' - 0.813"	8-8-8-6-4
32	32' - 0.813"	8-8-8-7-4
33	33' - 0.813"	8-8-8-8-4
34	33' - 8.313"	8-8-8-7-6
35	34' - 8.313"	8-8-8-8-6
36	35' - 8.313"	8-8-8-8-7

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
37	36' - 8.313"	8-8-8-8-8
38	38' - 3.813"	8-8-8-8-6-4
39	39' - 3.813"	8-8-8-8-7-4
40	40' - 3.813"	8-8-8-8-8-4
41	40' - 11.313"	8-8-8-8-7-6
42	41' - 11.313"	8-8-8-8-8-6
43	42' - 11.313"	8-8-8-8-8-7
44	43' - 11.313"	8-8-8-8-8-8
45	44' - 6.750"	8-8-8-8-8-6-3
46	45' - 6.750"	8-8-8-8-8-6-4
47	47' - 2.250"	8-8-8-8-8-6-6
48	48' - 2.250"	8-8-8-8-8-7-6
49	49' - 2.250"	8-8-8-8-8-8-6
50	50' - 2.250"	8-8-8-8-8-8-7

**Number of Lamps**

2' = (1) 2' lamp	6' = (2) 3' lamps
3' = (1) 3' lamp	7' = (1) 4' lamp & (1) 3' lamp
4' = (1) 4' lamp	8' = (2) 4' lamps



#825-00073  
V-0114