


Fixture Lengths

CSS


Fixture Type

Approval

Continuous Run Segments

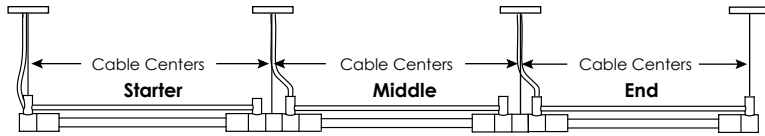

Stand Alone Overall Length



Fixture Length	Cable Centers (in)	Fixture Length	Cable Centers (in)	Fixture Length	Cable Centers (in)
2'	24.688"	2'	25.563"	2'	24.688"
3'	36.500"	3'	37.375"	3'	36.500"
4'	48.313"	4'	49.188"	4'	48.313"

Fixture Length	Cable Centers (in)	Overall Length (in)
2'	23.813"	24.813"
3'	35.625"	36.625"
4'	47.438"	48.438"

Continuous Run Lengths and Fixture Length Segments


Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
6	6' - 2.000"	3-3
7	7' - 1.813"	4-3
8	8' - 1.625"	4-4
9	9' - 3.375"	3-3-3
10	10' - 3.188"	4-3-3
11	11' - 3.000"	4-4-3
12	12' - 2.813"	4-4-4
13	13' - 4.563"	4-3-3-3
14	14' - 4.375"	4-4-3-3
15	15' - 4.188"	4-4-4-3
16	16' - 4.000"	4-4-4-4
17	17' - 5.750"	4-4-3-3-3
18	18' - 5.563"	4-4-4-3-3
19	19' - 5.375"	4-4-4-4-3
20	20' - 5.188"	4-4-4-4-4

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
21	21' - 6.938"	4-4-4-3-3-3
22	22' - 6.750"	4-4-4-4-3-3
23	23' - 6.563"	4-4-4-4-4-3
24	23' - 8.500"	4-4-4-3-3-3-2
24A	24' - 6.375"	4-4-4-4-4-4
25	24' - 8.313"	4-4-4-3-3-3-3
26	25' - 8.125"	4-4-4-4-3-3-3
27	26' - 7.938"	4-4-4-4-4-3-3
28	27' - 7.750"	4-4-4-4-4-4-3
29	28' - 7.563"	4-4-4-4-4-4-4
30	29' - 9.313"	4-4-4-4-4-3-3-3
31	30' - 9.125"	4-4-4-4-4-4-3-3
32	31' - 8.938"	4-4-4-4-4-4-4-3
33	32' - 8.750"	4-4-4-4-4-4-4-4
34	33' - 10.500"	4-4-4-4-4-4-3-3-3

Nominal Length (ft)	CSS Overall Length (in)	Fixture Length Segments
35	34' - 10.313"	4-4-4-4-4-4-4-3-3
36	35' - 10.125"	4-4-4-4-4-4-4-4-3
37	36' - 9.938"	4-4-4-4-4-4-4-4-4
38	37' - 11.688"	4-4-4-4-4-4-4-3-3-3
39	38' - 11.500"	4-4-4-4-4-4-4-4-3-3
40	39' - 11.313"	4-4-4-4-4-4-4-4-4-3
41	40' - 11.125"	4-4-4-4-4-4-4-4-4-4
42	42' - .875"	4-4-4-4-4-4-4-4-3-3-3
43	43' - .688"	4-4-4-4-4-4-4-4-4-3-3
44	44' - .500"	4-4-4-4-4-4-4-4-4-4-3
45	45' - .313"	4-4-4-4-4-4-4-4-4-4-4
46	46' - 2.063"	4-4-4-4-4-4-4-4-4-3-3-3
47	47' - 1.875"	4-4-4-4-4-4-4-4-4-4-3-3
48	48' - 1.688"	4-4-4-4-4-4-4-4-4-4-4-3

Number of Lamps

2' = (1) 2' lamp	6' = (2) 3' lamps
3' = (1) 3' lamp	7' = (1) 4' lamp & (1) 3' lamp
4' = (1) 4' lamp	8' = (2) 4' lamps



#825-00117
V-0614